



BS 5750: Part 1: 1987  
 ISO 9001: 1987  
 EN 29001: 1987  
 QAS 3433/5B Issue 1A

CERTIFICATE NO. FM 12734


A  
 HALMA  
 GROUP  
 COMPANY



**CROWCON**  
 DETECTION INSTRUMENTS

# KEYSWITCH CARD

**DI 948**

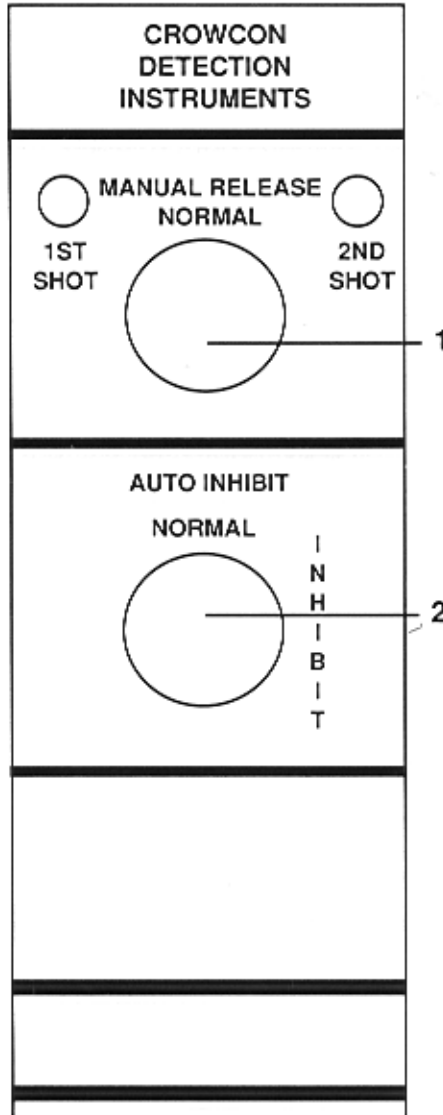

## FEATURES

- Prevents unauthorised access to executive action and extinguishant release.
- Custom design to suit customer requirements.
- Able to give access to:
  - extinguishant manual release
  - extinguishant auto release
  - isolation of output relays for executive or shutdown signals enabling full system test.
- Normally customer built with up to 3 keyswitches or 2 keyswitches and 2 push switches etc.

## GENERAL

- Gives extinguishant release from control panel, auto release inhibited and system test without disabling receipt of visual signals.

## SPECIFICATION

Construction	Front panel 3u high x 50mm wide Card 220mm long
Weight	350 grams
Connector	64 way DIN 41612 3 Micron Gold plating (min)
Temperature Range	-10 to +40°C
Humidity	95% R.H. Non-condensing

## KEY (TYPICAL):

1. 2 position keyswitch for Halon release.
2. Keyswitch to inhibit automatic Halon release.

STOCK NO.  
 M07086