MIDI RODDER



| Model | Description |
|---------|---------------------|
| 48200M | 200 ft midi rodder |
| 48400M | 400 ft midi rodder |
| 48600M | 600 ft midi rodder |
| 48800M | 800 ft midi rodder |
| 481000M | 1000 ft midi rodder |


Developed for 2" or 3" (5 or 7.6 cm) conduit and up to 1000 feet (305 m). The Midi rodder combines mid range lengths with high flexibility. Especially effective in pulling electric cable, winch rope, and midrange lengths of telecommunications cabling. This is an imported rod from Germany and is capable of tight bend radii without breaking.


Specifications:

| • | |
|------------------|-----------|
| Weight: | |
| 48200M | 70 lbs. |
| 48400M | 85 lbs. |
| 48600M | 100 lbs. |
| 48800M | 120 lbs. |
| 481000M | 135 lbs. |
| | |
| Pulling Strength | 2800 lbs |
| Bending Radii | 18" - 24" |
| | |

Includes:

- 3/8" (.95 mm) diameter rod from 200' to 1000'
- Vertical/Horizontal stand & spool with wheeled frame & spool brakes
- Threaded end fittings to accept all accessories
- Units come marked in feet (add an additional "M" to part number for marking in meters).








Toll Free 1-800-525-8460 Tel. (303) 936-7432 Fax. (303) 934-5581 sales@pelsue.com www.pelsue.com

PRODUCT DETAILS

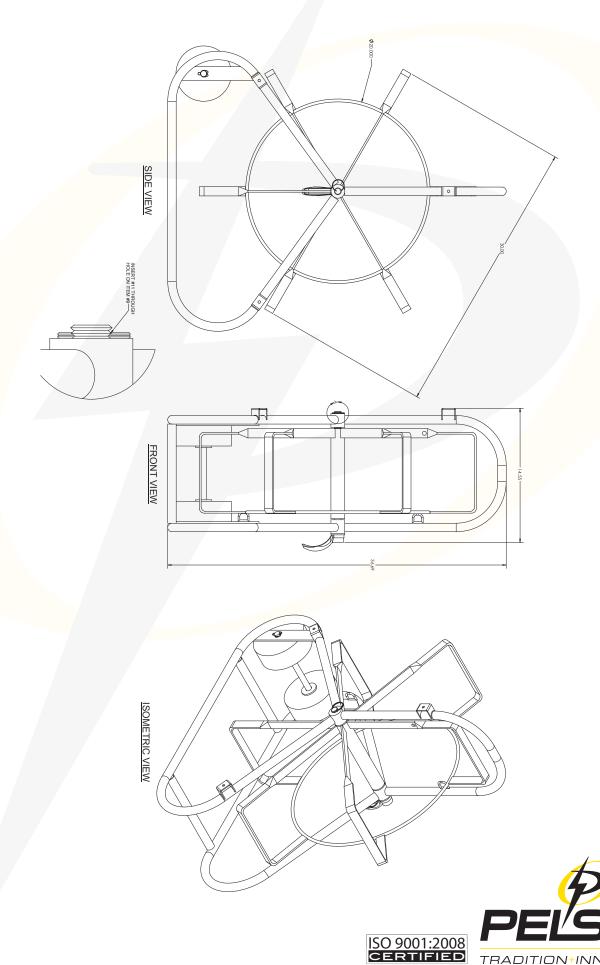

Toll Free 1-800-525-8460 Tel. (303) 936-7432 Fax. (303) 934-5581 sales@pelsue.com www.pelsue.com

TRADITION+INNOVATION