

Hand-Held Hose Spray/ Wall Mount

Model S19-430A

- Complies with American National Standard Z358.1-2004
- Laboratory Spray Valve
- Highly Visible Yellow-Colored Hose
- Wall Bracket Included
- Full, One-Year Warranty

Specifications

Perforated sprayhead provides soft spray for cleansing eyes and face. Handle stays open once valve is squeezed. Hose holder for wall hanging included.

UPC and cUPC Approved:

The Emergency Fixtures are certified to comply with the requirements of the Uniform Plumbing Code and the National Plumbing Code of Canada by the International Association of Plumbing and Mechanical Officials (IAPMO).

Standard Equipment

Sprayhead


Perforated sprayhead is ABS plastic and provides soft spray for cleansing eyes and face. Includes protective sprayhead covers. Integral flow control assures safe, steady flow under varying water supply conditions.

Valve

Chrome plated brass w/ extended handle stays open once handle is squeezed.

Drench Hose

8' (2438mm) yellow reinforced thermoplastic hose has 3/8" IPS male thread. Burst strength is 450 PSI.

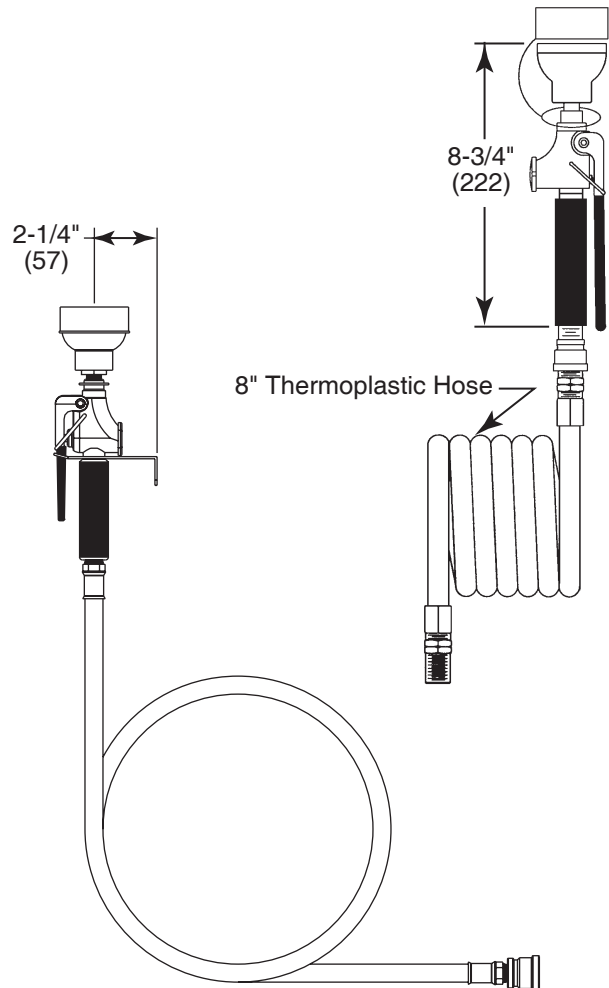

MODEL	
Model No.	Description
☐ S19-430A	Hand-Held Hose Spray- wall mount

IMPORTANT NOTES:

- Drench hoses must provide a controlled flushing fluid flow that is both tepid and non-injurious to the user per ANSI Z358.1-2004. Refer to ANSI Z358.1-2004 for complete regulatory information regarding the performance, installation, maintenance, and training requirements for drench hoses.
- Installer to supply backflow prevention as required by UPC, IPC and/or local plumbing codes. Contact Bradley or visit www.bradleycorp.com for available options.

Document No. 4750

This information is subject to change without formal notice.
© 2004 Bradley Corporation
6-5-2006 (1 Page Total)

EF4750.1

Bradley 

P.O. Box 309, Menomonee Falls, WI 53052-0309
Phone 1-800-BRADLEY FAX 262-251-5817
Web Site: <http://www.bradleycorp.com>